


# F3 2.0

## SPECIFICATIONS

<b>WEIGHT</b>	♂ 14.2 kg ♀ 14.5 kg
<b>SIZES</b>	♂ 50-54-57-60-63cm ♀ 47-50-53-56-59cm
<b>COLOUR</b>	Silver matt
<b>FRAME</b>	Smooth welded frame. Triple-buttet hydroformed aluminium tubes. Down tube with internal shifter and brake cables, tapered headtube with integrated 1 <sup>1</sup> / <sub>8</sub> "/1 <sup>1</sup> / <sub>4</sub> " headset, integrated rear carrier and mudguard attachment and replaceable rear derailleur hanger.
<b>FRONT FORK</b>	KOGA alloy rigid fork with integrated headlight and mudguard attachment
<b>HEADSET</b>	Industrial bearing - Integrated in frame
<b>HANDLEBAR</b>	KOGA Riser alloy
<b>STEM</b>	KOGA adjustable Oversized
<b>HANDLEBAR TAPE/GRIPS</b>	KOGA Sport
<b>DISC-/HYDRAULIC BRAKE SET (F)</b>	Shimano MT201 hydraulic disc brake, IS type
<b>DISC-/HYDRAULIC BRAKE SET (R)</b>	Shimano MT201 hydraulic disc brake, IS type
<b>ROTOR FRONT</b>	Shimano RT-30 160mm
<b>ROTOR REAR</b>	Shimano RT-30 160mm
<b>SHIFT LEVER (R)</b>	Shimano Deore T6000
<b>SHIFT LEVER (L)</b>	Shimano Deore T6000
<b>CHAIN</b>	KMC X10-93
<b>CRANK SET</b>	Shimano T520 44-32-24T for 10-speed
<b>BOTTOM BRACKET</b>	Shimano Sealed cartridge Octalink
<b>CASSETTE</b>	Shimano HG-500 10 speed - 12-28T
<b>REAR DERAILLEUR</b>	Shimano Deore T6000 10-speed
<b>FRONT DERAILLEUR</b>	Shimano Deore T6000 for 3x10-speed
<b>FRONT HUB</b>	Shimano Dynamo Hub Nexus 3D37
<b>REAR HUB</b>	Shimano T4000 Disc
<b>TIRE (F)</b>	Schwalbe Spicer Plus 40-622
<b>TIRE (R)</b>	Schwalbe Spicer Plus 40-622
<b>TUBE</b>	Schwalbe
<b>RIM (F)</b>	Rodi Airline Corsa Disc
<b>RIM (R)</b>	Rodi Airline Corsa Disc
<b>SPOKES F1</b>	Sapim Strong
<b>SADDLE</b>	KOGA Sport
<b>SEAT POST</b>	KOGA alloy 27.2mm
<b>MUDGUARD (F)</b>	KOGA 46mm
<b>MUDGUARD (R)</b>	KOGA 46mm
<b>HEADLIGHT</b>	B&M Avy 40 Lux
<b>REAR LIGHT</b>	Spanninga Plateo
<b>REAR CARRIER</b>	Racktime frame integrated
<b>KICKSTAND</b>	Ursus Mooi
<b>BELL</b>	Widek Compact
<b>PEDALS</b>	KOGA Sole-Mate
<b>PUMP</b>	KOGA Telescopic

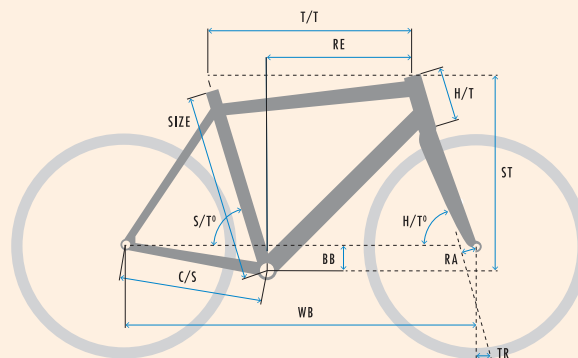

## GEOMETRY

♂ GENTS

♀ LADIES

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST	SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
50	575	457	1074	55	45	70.5	72.0	75	115	389	572	47	566	457	1065	69	45	70.5	72.0	75	135	369	606
54	590	457	1067	55	45	71.5	71.0	68	135	385	595	50	573	457	1073	69	45	70.5	72.0	75	145	373	615
57	605	457	1082	55	45	71.5	71.0	68	155	394	614	53	580	457	1080	69	45	70.5	72.0	75	155	377	625
60	620	457	1097	55	45	71.5	71.0	68	180	400	638	56	587	457	1057	69	45	71.5	71.0	68	165	367	638
63	635	457	1112	55	45	71.5	71.0	68	210	405	667	59	594	457	1064	69	45	71.5	71.0	68	180	369	653