


E-WORLDTRAVELLER

SPECIFICATIONS

WEIGHT	⚖️ 23.3 kg ⚖️ 23.5 kg
SIZES	📏 50-54-57-60-63cm 📏 47-50-53-56-59cm
COLOUR	Black Metallic high gloss
FRAME	Super smooth aluminium frame. Special down tube with internal battery pack, integrated headset and rear carrier.
FRONT FORK	KOGA alloy rigid fork with lowrider mount and integrated steering limiter
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Oversized Trekking alloy
STEM	KOGA Adjustable
HANDLEBAR TAPE/GRIPS	Ergon GP3
DISC-/HYDRAULIC BRAKE SET (F)	Shimano MT400 hydraulic disc brake, IS type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano MT400 hydraulic disc brake, IS type
ROTOR FRONT	Shimano RT-54 160mm
ROTOR REAR	Shimano RT-54 160mm
SHIFT LEVER (R)	Shimano Deore XT T8000
CHAIN	KMC X10E EPT
CASSETTE	Shimano HG-500 10 speed - 11-34T
REAR DERAILLEUR	Shimano Deore XT T8000 10-speed
DERAILLEUR GUARD	KOGA Q-guard: combined Quick Release and rear derailleur protection
FRONT HUB	Shimano Deore M6000
REAR HUB	Shimano Deore M6000 Disc
TIRES	Schwalbe Marathon 50-622
TUBE	Schwalbe
RIMS	Ryde ZAC421 Disc
SPOKES	Sapim Leader
SADDLE	Selle Italia Sportourer FLX
SEAT POST	KOGA alloy 27.2mm
CHAIN GUARD	Hesling Move
MUDGUARD (F)	KOGA 58mm
MUDGUARD (R)	KOGA 58mm
HEADLIGHT	B&M Eyc 50 Lux
REAR LIGHT	Spanninga Plateo
REAR CARRIER	Tubus Logo Evo - Steel tubing max 40 kg - High/Low bag position - Durable black powdercoated finish - Integrated rearlight wiring - 30 years guarantee
LOW-RIDER	Tubus Ergo incl. kickstand
LOW-RIDER KICKSTAND	Yes
KICKSTAND	Pletscher Comp
BELL	Widek Compact
RING LOCK	Trelock RS 450 - ART ** Approved
PEDALS	KOGA Sole-Mate
PUMP	KOGA Telescopic
BOTTLE	KOGA Bottle 550 ml
BOTTLE HOLDER	KOGA Bottle cage black
MOTOR	Bosch Performance Line Gen3
BATTERY & CHARGER	Bosch Li-Ion 500Wh (36V*13.4Ah) Frame mount type, removable from frame. Charger 4Ah.
DISPLAY	Bosch Intuvia

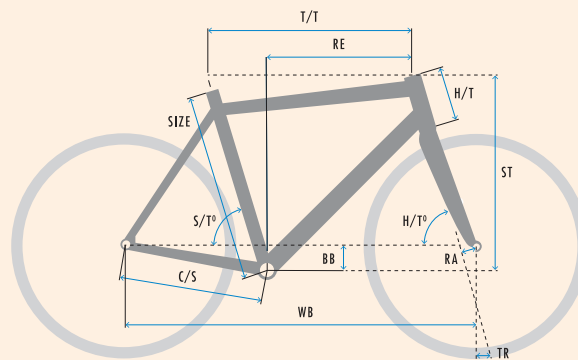

GEOMETRY

♂️ GENTS

♂️ MIXED

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST	SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
50	570	476.5	1113	60	50	70.0	73.5	73	140	399	578	47	566	476.5	1112	60	50	70.0	73.5	73	175	385	611
54	580	476.5	1124	60	50	70.0	73.5	73	155	405	592	50	574	476.5	1120	60	50	70.0	73.5	73	185	390	620
57	601	476.5	1135	60	50	70.5	73.0	69	175	414	613	53	583	476.5	1118	60	50	70.5	73.0	69	195	390	632
60	604	476.5	1133	60	50	70.5	72.5	69	195	405	632	56	590	476.5	1125	60	50	70.5	73.0	69	205	394	641
63	620	476.5	1138	60	50	71.0	72.0	66	225	405	662	59	600	476.5	1124	60	50	71.0	72.5	66	215	394	653