


E-INSPIRE

SPECIFICATIONS

WEIGHT	♂ 23.8 kg ♀ 23.9 kg
SIZES	♂ 50-54-57-60cm ♀ 47-50-53-56cm
COLOUR	Black Metallic/Reflex Blue high gloss
FRAME	Super smooth welded double butted aluminium frame. Integrated shifter and brake cables, headset and rear carrier.
FRONT FORK	KOGA alloy Feathershock - 30mm travel
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Ergosport Touring alloy
STEM	KOGA adjustable Oversized
HANDLEBAR TAPE/GRIPS	KOGA Ergonomic
DISC-/HYDRAULIC BRAKE SET (F)	Shimano MT201 hydraulic disc brake, IS type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano MT201 hydraulic disc brake, IS type
ROTOR FRONT	Shimano RT-30 160mm
ROTOR REAR	Shimano RT-30 160mm
SHIFT LEVER (R)	Shimano Deore M5100
CHAIN	KMC X11e-T Turbo
CRANK SET	KOGA
CASSETTE	Shimano CS-5100 11-speed - 11-42T
REAR DERAILLEUR	Shimano Deore M5120 11-speed
FRONT HUB	Shimano Deore M6000
REAR HUB	Shimano Deore M6000 Disc
TIRE (F)	Schwalbe Energizer Active Plus 40-622
TIRE (R)	Schwalbe Energizer Active Plus 40-622
TUBE	Schwalbe
RIM (F)	Ryde ZAC421
RIM (R)	Ryde ZAC421
SPOKES	Sapim Strong
SADDLE	♂ Selle Royal Ariel Skingel ♀ Selle Royal Nuvola Skingel
SEAT POST	KOGA alloy shock absorbing suspension seat post 27.2mm
CHAIN GUARD	Hesling Move
MUDGUARD (F)	SKS 50mm
MUDGUARD (R)	SKS 50mm
HEADLIGHT	B&M Eyc 50 Lux
REAR LIGHT	Spanninga Plateo
REAR CARRIER	KOGA frame integrated for Bosch battery
KICKSTAND	Pletcher Comp
BELL	Widek Compact
RING LOCK	Trelock RS 450 - ART ** Approved
PEDALS	KOGA Sole-Mate
PUMP	KOGA Telescopic
MOTOR	Bosch Active Line Plus
BATTERY & CHARGER	Bosch Li-Ion Powerpack 300Wh/400Wh/500Wh. Charger 4Ah.
DISPLAY SET	Bosch Intuvia

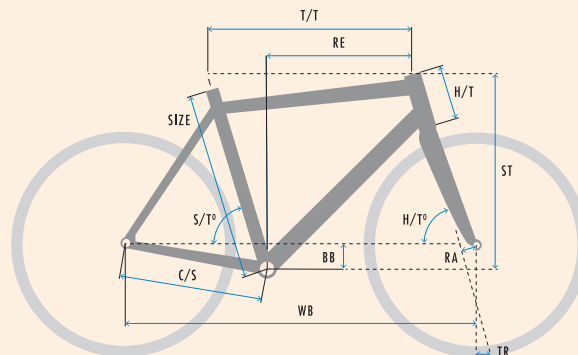

GEOMETRY

♂ GENTS

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
50	575	467	1084	55	45	70.5	72.0	75	125	384	590
54	590	467	1077	55	45	71.5	71.0	68	140	381	608
57	605	467	1092	55	45	71.5	71.0	68	160	389	627
60	620	467	1107	55	45	71.5	71.0	68	185	396	651

♀ LADIES

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
47	566	467	1069	69	45	70.5	72.0	75	140	365	618
50	573	467	1076	69	45	70.5	72.0	75	150	372	627
53	580	467	1083	69	45	70.5	72.0	75	160	373	637
56	587	467	1067	69	45	71.5	71.0	68	170	363	650